

What's New in QuickMail Pro 2.1



CE Software, Inc.
1801 Industrial Circle
West Des Moines, Iowa 50265
www.cesoft.com

Copyright © 2000. All rights reserved.
QuickMail Pro is a trademark of CE Software, Inc. All other product, corporate, and service names are trademarks or registered trademarks of their respective holders.


QuickMail Pro 2.1 Changes

QuickMail Pro 2.1 offers new features that are discussed in this document. This document is a supplement to the QuickMail Pro 2.0 documentation.

Automatic Software Updates

QuickMail Pro client software can now be updated directly from a QuickMail Pro Server. The QuickMail administrator configures the client updates on the QuickMail Pro Server. The client software then checks for software update information from the server during login.


Clients using online mode will receive notification of an update during login. Clicking the Update Now button will download a copy of the update and begin the update process. If the update is required, the Later button will be disabled.

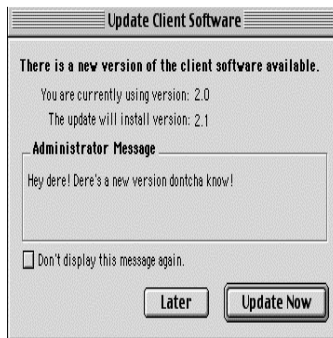


Multiple User Support in Mac OS 9

Previous versions of QuickMail Pro stored all the user data in the System folder. To take advantage of multiiple user support in Mac OS 9, QuickMail users may now choose to store their data in the Documents folder (under Mac OS 9, items in the Documents folder can only be accessed by the current user).

To change the location of QuickMail user data, click the Change User button in the login dialog. When the QuickMail Users dialog appears, select the account and click the Location... button.

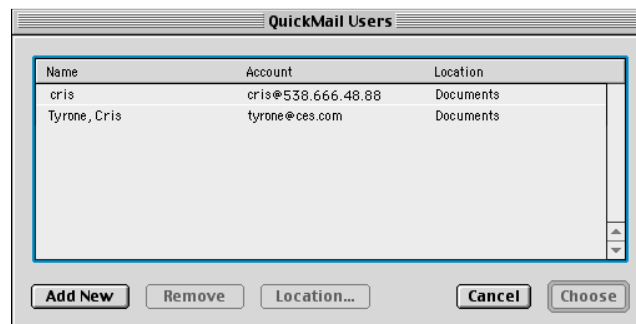


Choose the storage location for the QuickMail account data and click the Move button.

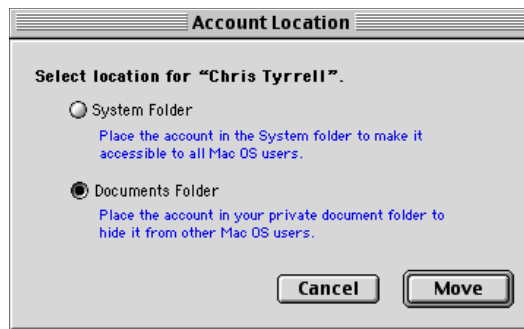


Lock Client

The Lock feature enables users to secure the QuickMail Pro application from unauthorized access without logging out. When locked, all QuickMail windows will be hidden from view and a QuickMail Account Locked window is displayed. Mail will continue to be retrieved and sent at scheduled connection times.

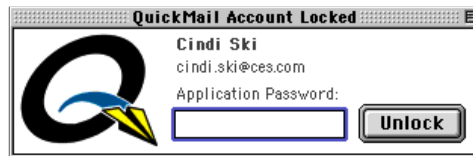

The Lock feature can be enabled manually by selecting **Lock...** from the **File** menu. There are additional options in the System preferences panel to lock QuickMail when idle for a specified amount of time or when quitting the application.

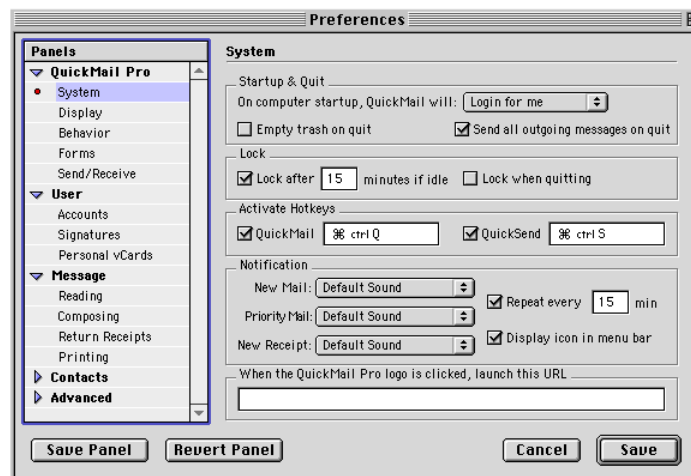

Search Address Books

With the new Search Contacts feature, users can search address books for contacts using a variety of criteria.




Mac users can access the Search feature by clicking the Search button in the Contacts Manager window or by selecting **Find Contact...** in the **Edit** menu. Windows users can also access the Search feature by clicking the Search button or by selecting **Search...** in the Contacts Manager **Edit** menu.


Contact Categories

Contacts can now be assigned to one or more customizable categories which can be used for filtering and performing searches.

To assign a category, click the icon for the Category pop-up menu in the Contact window and make your selection(s).

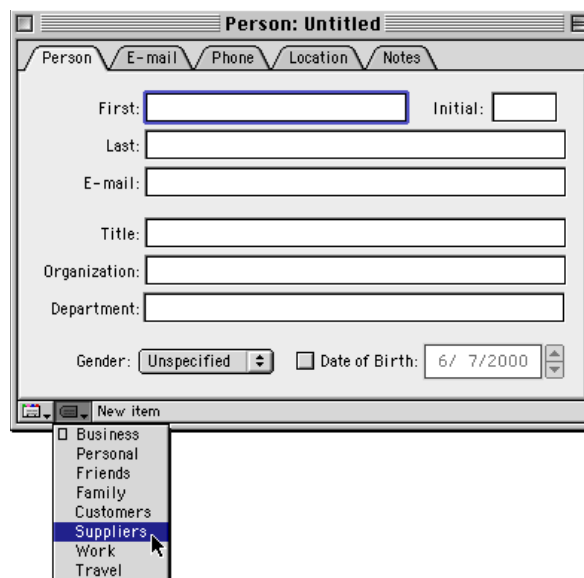


Up to sixteen categories can be defined in the Categories preferences panel.

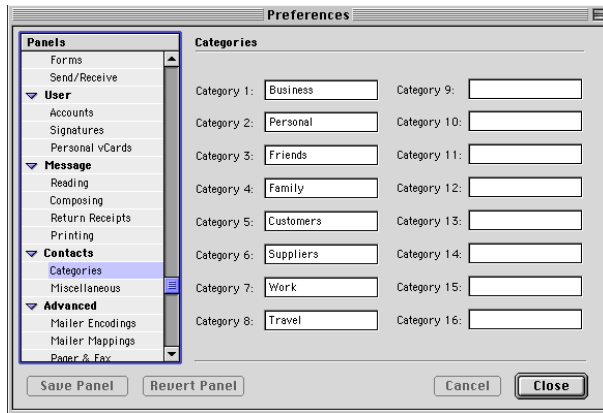


Printing Contacts

QuickMail Pro now supports printing of entries in the Contact Manager. Mac users can choose the font style and information to print by selecting QuickMail Pro in the Print dialog. Windows users make these selections in the Printing preferences panel. When printing from QuickMail Windows, only the selected contacts will be printed.

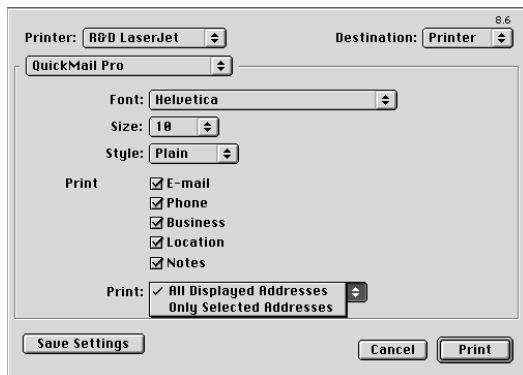


Mac

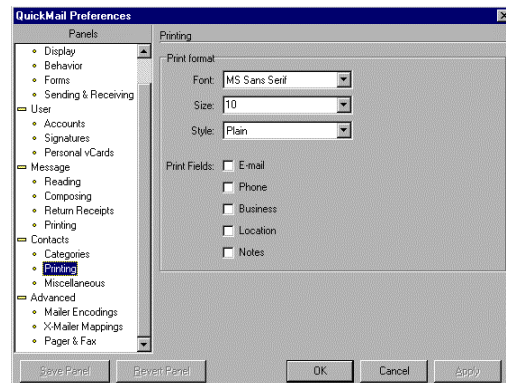

Windows


Viewing HTML Messages

QuickMail Pro now supports viewing of HTML messages. Mac users can preview the HTML content of messages by clicking the HTML button in the Message window. This button is shown only in HTML-formatted messages.

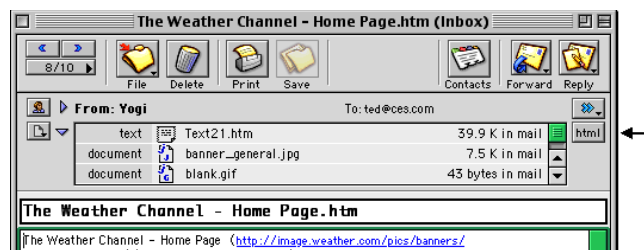

Windows users can choose to view HTML content in the Message Peek pane, the

Message window or both. These options have been added to the Reading preferences panel.

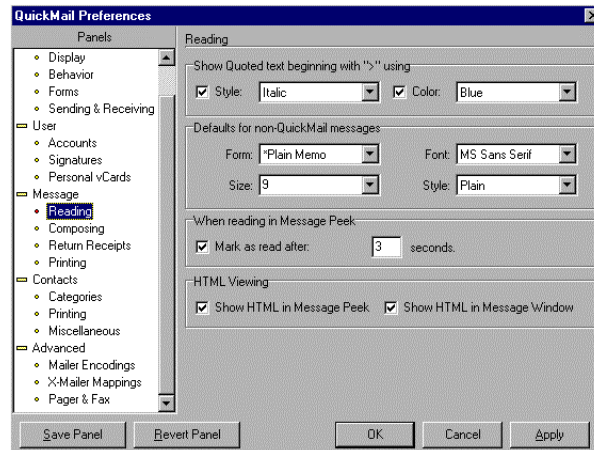

Add File Extension to Attachment

(Mac client only)

When sending attachments from a Mac client to recipients whose encoding is not Mac OS, the attachment's file type is used to automatically append the appropriate file name extension to the attachment name. For example, a Microsoft Word attachment would automatically receive a .doc file name extension.

To disable this feature, open the Mailer Encodings preference panel and select the Mailer Encoding type to edit. Uncheck the "Append file name extensions" checkbox and click OK.